



CLEARPATH

SIGNAGE SYSTEMS.

Steel™

FISSO®

Steel™ stainless stand-offs are an excellent choice for your industrial and outdoor projects, because they have a high durability and corrosion resistance, a low sleek profile and an integrated stand-off cap.

Features:


- » Material: stainless steel
- » Tamper resistant feature: locking set screw
- » Tamper resistant feature: low profile cap
- » Indoor and outdoor weatherable
- » Installation method: drywall screws & anchors
- » Recommended load/pc (15, 20, 25): 33 lbs / 15 kg*
- » Recommended load/pc (FS5050IX): 66 lbs / 30 kg*
- *ClearPath is not liable for installation techniques and wall conditions
- » Required hole diameters in signage substrate
 - FS1515IX: 0.28" / 7 mm
 - FS2020IX: 0.35" / 9 mm
 - FS2525IX: 0.43" / 11 mm
 - FS5050IX: 0.63" / 16 mm
- » Substrate thickness:
 - FS1515IX: 0.08-0.43" / 2-11 mm
 - FS2020IX: 0.08-0.43" / 2-11 mm
 - FS2525IX: 0.08-0.63" / 2-16 mm
 - FS5050IX: 0.20-1.57" / 5-40 mm
- » Sold in packs of four
- » Assembly kit included



Diameter	Cap Height / Barrel Length	Item Code
0.59" [15.0 mm]	0.08" / 0.59" [2.0 mm] / [15.0 mm]	FS1515IX
0.78" [20.0 mm]	0.08" / 0.78" [2.0 mm] / [20.0 mm]	FS2020IX
0.98" [25.0 mm]	0.08" / 0.98" [2.0 mm] / [25.0 mm]	FS2525IX
1.97" [50.0 mm]	0.20" / 1.97" [5.0 mm] / [50.0 mm]	FS5050IX



finish:



stainless steel


stand-offs



Actual Size



Scale: 2x (FS1515IX shown)

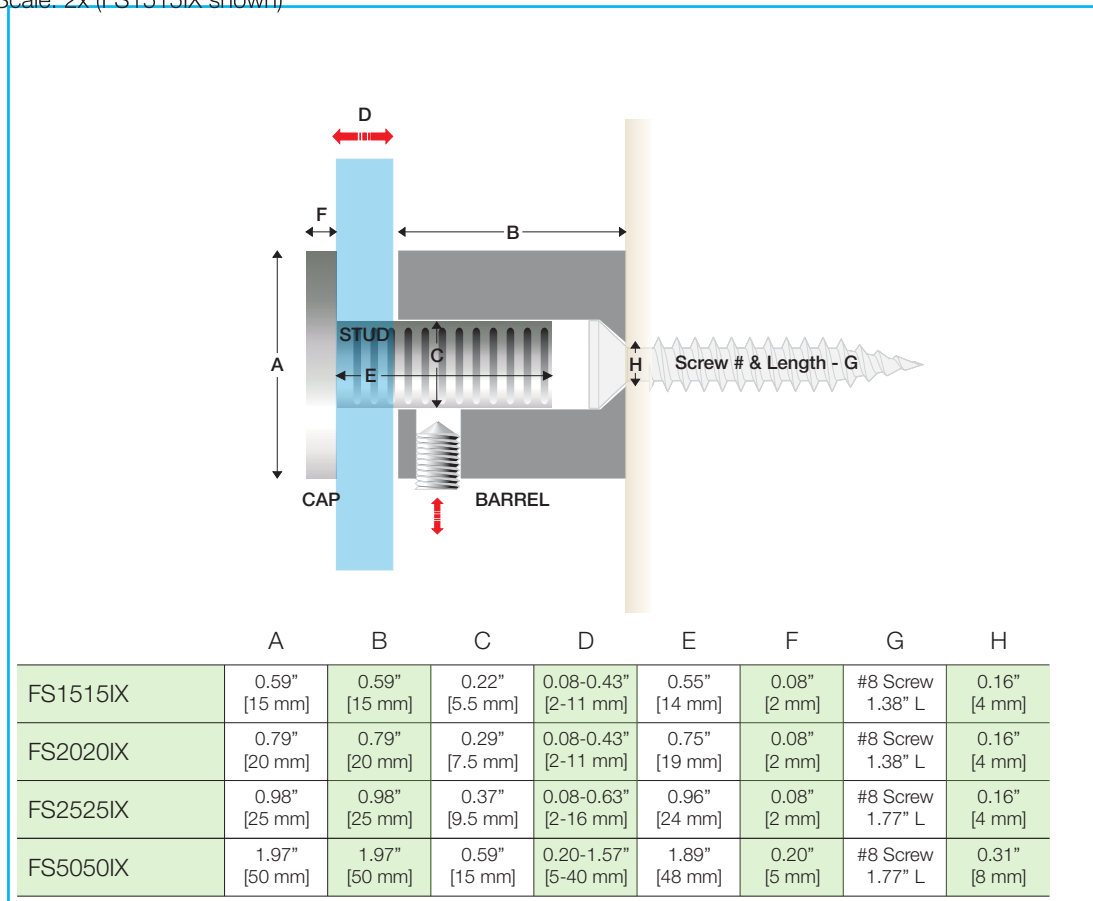

stand-offs